


COMPACT COACHSCREWING MACHINE

TC

*High output and precise
coachscrewing machine*

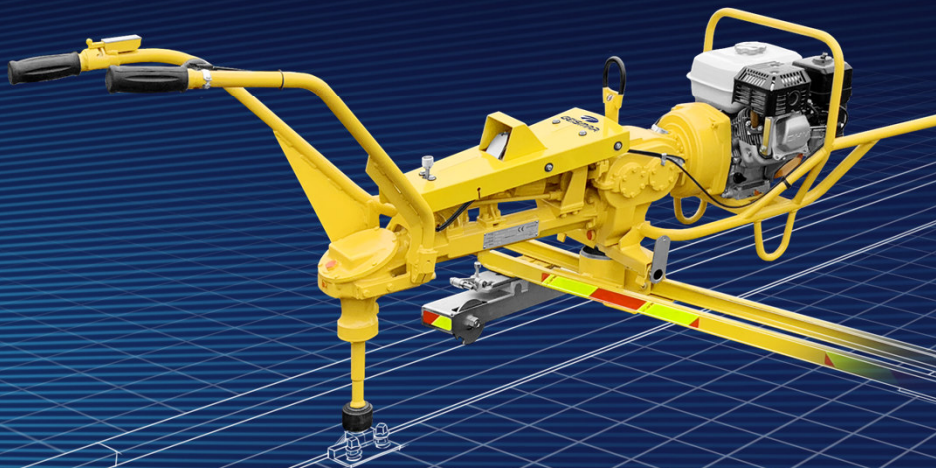

Designed for intensive operations

Light and well-balanced

Easy to use and robust



COMPACT COACHSCREWING MACHINE


TC

Your benefits

- Ergonomic and repeatable coachscrew tightening thanks to the pneumatic action clutch
- Comfortable to use and well balanced
- High efficiency coachscrewing with two rotation speeds (low speed for tight fastening and high speed for better output)
- Easy and precise torque controlling with the pneumatic torque limitation and the torque dial
- Extended machine lifespan thanks to its durable design and the reliable Honda engine (the engine benefits from Honda warranty)



Lighting (optional)

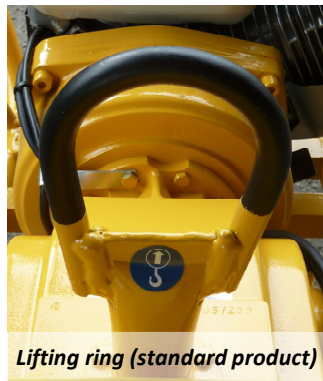

Lifting ring (standard product)



Torque dial (standard product)

Specifications

Engine	Honda GX200
Engine power	4.3 kW (5.8 hp) 3,600 rpm
Socket square drive dimension	23 mm (0.9 in.)
Mass (in working order)	90 kg (198 lbs)
Dimensions (L x W x H)	2 030 x 500 x 950 mm (80 x 20 x 37 in.)
Spindle rotation	Low speed: 105 rpm High speed: 200 rpm
Maximum screwing torque (low/high speed)	37 daN.m
Maximum intermittent unscrewing torque (low/high speed)	160 daN.m

Consumables

- Coachscrew or bolt socket (*different sizes available*)

Accessories

- Protective cover
- Removable fishbolting device
- 4-wheels traversing trolley (with or without braking device) *
- 2-wheels trolley *

* *Various track gauge available*

Optional equipment

- LED socket lighting device
- Other engines (Diesel or electric)
- Different gearbox with 60/160 rpm and maximum untightening torque 103 daN.m
- 1" socket square drive